



HANDI[®] 800mm DOUBLE FACE

Analogue clock HANDI[®]
Double face.
Aluminium case.
Distance of legibility : 80m




Time setting

The professional HANDI[®] clocks can display the same information, by synchronizing through a master clock or a time server.

Specification

Power supply	230VAC NTP Version : POE (Power Over Ethernet)
Certification	CE, EN 60950, EN 55022, EN 50024
IP	IP20, 54 / for outdoor option IP65 front / 54 back.
MTBF	85 000 hrs
MTTR	20 min
Operating temperature	Without lighting : -20° to +50°C With lighting : -30° to +50°C On request (extreme environment: ultra high temperature*): Indoor: -20°C to 55°C Outdoor: -20°C to 70°C
Weight	22 kg
Dimension	Diameter : 800mm Thickness : 200mm Bracket supports : see schemas below

*Operation under ultra high temperature accelerates deterioration thus reducing lifespan of the product.

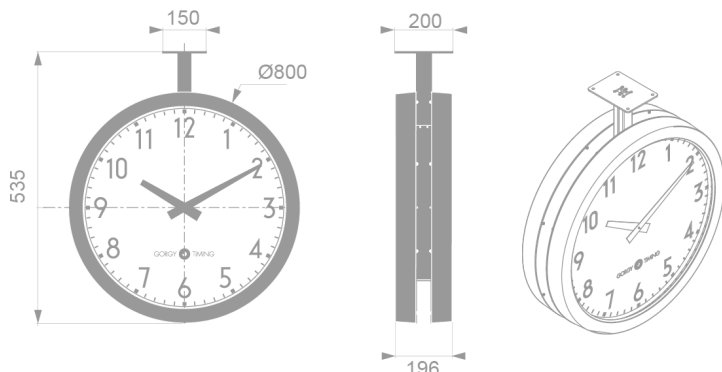

Key features

- **Fast but approximate reading of time.**
- Flat aluminium case.
- Acrylic front cover (Polymethyl methacrylate).
- Ceiling mounting with bracket or flag.
- Time setting by synchronization source.
- LED lighting

Remote management (on NTP version)

Remote configuration and time setting via WEB interface in Http(s).
Automatic time zone choice and daylight saving time change.
Supervision via HTTP, Telnet. "GT Network Manager" (Windows® NT/XP/2000/Vista (32 bits) /Windows 7).
Supervision with SNMP protocol v1, v2c and v3.
Syslog reports.
Compatible with GTNetConfig software which allows to configure the clocks in one total batch or in groups.

Display

Aluminum dial lacquered white.
Arabic numerals screen printed in black.
Black lacquered hands.
Trade mark and logo GORGY TIMING screen printed on the dial.

Synchronization inputs

Quartz time base to be synchronized by (only one choice may be made from the list below):

- AFNOR NFS 87500/IRIG B
- NTP Ethernet 10/100 base T
- DHW 869.525 MHz
- Wi-Fi (IEEE 802.11 B/G standard).

HANDI® 800mm – DOUBLE FACE

		ITEM CODE							
		7	8	2	/				
		↑	↑	↑	↑				
ILLUMINATION									
Without illumination	✘	6							
With illumination	✘	7							
VERSION									
AFNOR NFS 87500 (230VAC power supply);+ second hand	✘	8							
AFNOR NFS 87500 (230VAC power supply)	✘	9							
DHW 869.525 MHz Synchronization (230VAC power supply)	✘	M							
NTP Ethernet 10/100BaseT Synchronization (115VAC power supply)	✘	R							
NTP Ethernet 10/100BaseT Synchronization (230VAC power supply)	✘	N							
NTP Ethernet 10/100BaseT Synchronization (Power Over Ethernet)	✘	P							
Wi-Fi (IEEE 802.11 B/G standard) (230VAC power supply)	❖	W							
MOUNTING									
Ceiling mount bracket	✘					P			
OPTIONS									
Waterproof Case	✘						W		

