


LEDI 1/60/S

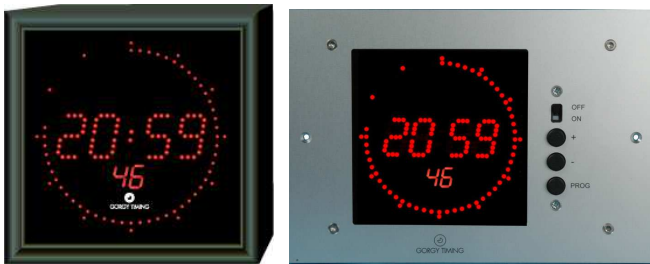

LED 7 segment display: Hour, minute. Legible up to 5 meters
 Height of digits: Hour and minute = 18 mm
 Second: circle line of 60 LED. Ø 80 mm
 backup of time information during 2 days by internal Ni-Mh battery in the event of mains failure.

Power supply:

- 230VAC/50-60Hz. Classe 2
- 115VAC/50-60Hz. Classe 2
- 18 to 36 VDC.



9VDC 1A on connector

Operating temperature range: -20°C to +70°C

Gloss painted ultra-flat aluminium case. Wall mount surface
 Dimensions: 115 x 115 mm - Thickness 40 mm. Net weight 1.5Kg

Manual adjust luminosity

Complies to standards for resistance to fire **EN 60950** and **IEC 60950**.

| VERSION | ITEM CODE | | | | | | | | |
|---|--------------------------|---|---|---|---|---|--|---|--|
| | 3 | 1 | 5 | 2 | 0 | 0 | | | |
| Independent: Radiosynchronisable quartz time base 3.6864 MHz Accuracy: +/- 0.1 sec/24h (between 20° to 30°C) | <input type="checkbox"/> | 2 | | | | | | | |
| Minute 24V/6mA parallel reversed pulses receiver clock | <input type="checkbox"/> | 3 | | | | | | | |
| Half-minute serial reversed pulses receiver clock. Electric consumption 1.25V. 60 to 120mA. Shunt 39 ohms | <input type="checkbox"/> | 5 | | | | | | | |
| Second 24V/6mA reversed pulses receiver clock | <input type="checkbox"/> | 6 | | | | | | | |
| AFNOR NFS 87500* time code receiver clock | <input type="checkbox"/> | 8 | | | | | | | |
| SMPTE-EBU time code receiver clock | <input type="checkbox"/> | 7 | | | | | | | |
| (*)IRIG.B Version : to be specified as « remark » on your Purchase Order | | | | | | | | | |
| COLOUR OF LED | | | | | | | | | |
| Red <input type="checkbox"/> | | 1 | | | | | | | |
| Green <input type="checkbox"/> | | 2 | | | | | | | |
| CASE | | | | | | | | | |
| Standard: Wall mounting surface <input type="checkbox"/> | | 1 | | | | | | | |
| Flush mountable (160x135,5 Thickness 33mm)-Colourless Anodised front <input type="checkbox"/> | | 3 | | | | | | | |
| IP 54 watertight. With antitheft device. Dimensions: 195x195x125 mm <input type="checkbox"/> | | 7 | | | | | | | |
| Flush mountable with set buttons on front face- Colourless Anodised front <input type="checkbox"/> | | E | | | | | | | |
| Flush mountable 19" 3U - Colourless Anodised front <input type="checkbox"/> | | 6 | | | | | | | |
| COLOUR OF CASE | | | | | | | | | |
| Standard: BLACK RAL 9005- or Colourless Anodised front <input type="checkbox"/> | | 0 | | | | | | | |
| POWER SUPPLY | | | | | | | | | |
| Standard : 230VAC/50-60Hz <input type="checkbox"/> | | 0 | | | | | | | |
| 115VAC/50-60Hz <input type="checkbox"/> | | 1 | | | | | | | |
| 9 VDC (Jack plug) <input type="checkbox"/> | | 3 | | | | | | | |
| 18 to 36 VDC <input type="checkbox"/> | | 5 | | | | | | | |
| OPTION | | | | | | | | | |
| Radio synchronization on DCF/Germany. Antenna + 4m of cable <input type="checkbox"/> | | | | | | | | D | |
| Or: Radio synchronization on TDF/France-Inter. Antenna + 4m of cable <input type="checkbox"/> | | | | | | | | F | |
| Timer on Sub D connector : remote control with 2m of cable (Up/Down/intermediate time) <input type="checkbox"/> | | | | | | | | K | |
| ASCII OUTPUT RS232 <input type="checkbox"/> | | | | | | | | A | |
| Or: RS 232 ASCII Input <input type="checkbox"/> | | | | | | | | B | |
| Or: ASCII OUTPUT RS422-485 <input type="checkbox"/> | | | | | | | | R | |
| Or: ASCII RS422-485 Input <input type="checkbox"/> | | | | | | | | Q | |
| Electronic boards tropicalized <input type="checkbox"/> | | | | | | | | U | |

