

LEDI® REVERSO 5

Indoor / Double face




Professional LED clock, robust and stylish combining the best of the technology for an easy installation and operation.



Time setting

The professional LEDI® clocks can display the same time information, synchronized by a master clock or a time server.

Specification


Power supply	230VAC/50-60Hz 115VAC/50-60Hz Low voltage 24VDC
Certifications	CE, EN 60950, EN 55022, EN 55024, ROHS
Consumption maximale	6 VA (Single Face) 12 VA (double face)
IP	30
MTBF	56 000 h.
MTTR	Display : 5 min.
Weight	≈ 1.2 – 1.6 kg
Dimensions	235x145 x99 mm (LxHxD) Mounting bracket : 150 mm
Digit height	Hour/minute : 50 mm
Maximal distance of legibility	2 meters
Shock resistance	IK9
Operating temperature	-20° to 50°C
Electrical equipment classification	Classe 2 

Points forts

- Perfectly silent, direct and accurate reading of time.
- SMD LED technology.** Display in Red.
- The patented technology of the light guide provides a perfect regularity of the brightness and viewing angle at 160°.
- The front face of the LEDI® is coated with an antiglare and anti-scratch film giving an extraordinary 60000 : 1 level of contrast.
- A protection against over-voltage and industrial interference via EMC filter.
- An easy "plug and play" installation.
- A matt finish anodized aluminium case:
- Double Face IP30.
- Its participation in the sustainable development, life span over 20 years.
- 2 years warranty.

Synchronization inputs

- AFNOR NFS 87500
- IRIG B : shall be specified on purchase order.

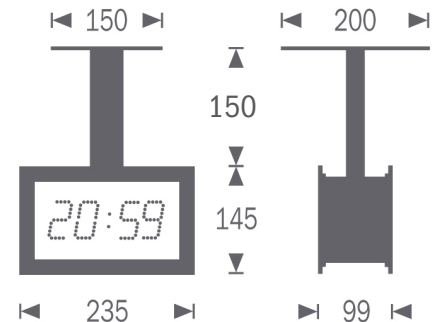

Display / LED specifications

Simple row LED display.
SMD Technology, Viewing Angle: 160°.
SMD Technology, Viewing Angle: 160°.

Red	245 mcd
-----	---------



LEDI® REVERSO 5 Indoor / Double face

		ITEM CODE								
		ND350								
VERSION		↑	↑	↑	↑	↑	↑	↑		
AFNOR NFS 87500 / IRIG B receiver clock* <input type="checkbox"/>		8								
*IRIG.B Version : to be specified as « remark » on your Purchase Order.										
DISPLAY										
Double face <input type="checkbox"/>		2								
LED										
red <input type="checkbox"/>		1								
Mounting										
To be associated with requested brackets** <input type="checkbox"/>							P			
** Please refer to the brackets technical sheet										
COLOUR OF CASE										
Standard : anodized aluminium <input type="checkbox"/>							7			
Black painted aluminium <input checked="" type="checkbox"/>							0			
Specific <input checked="" type="checkbox"/>							-			
POWER SUPPLY										
Standard : 230VAC/50-60Hz <input type="checkbox"/>							0			
115VAC/50-60Hz <input type="checkbox"/>							1			
Low voltage power : 24 VDC <input type="checkbox"/>							4			
OPTIONS										
Stop clock function via WEB interface <input type="checkbox"/>									F	
Tropicalized version <input type="checkbox"/>									U	